

VAN BUREN SERIES | B-VENT FIREPLACES



AMERICAN HEARTH



VAN BUREN PREMIUM & DELUXE MODELS

Van Buren B-Vent Fireplaces combine modern technology with traditional venting to create the appearance and performance of a conventional fireplace but with the convenience of gas.

Our B-Vent systems let you prolong the flicker of the flames without overheating your room. The BVD34 input is 21,000 Btu; the BVD36 is 25,000 Btu; and the Premium BVP42 is 30,000 Btu.

FBB4 automatic Blower with variable speed control may be used on Louvered models.

STANDARD FEATURES

- Millivolt and Intermittent Pilot Models
- Louvered and Flush Models
- Natural Gas (Propane conversion available)
- Zero Clearance Certified
- Remote Control Options
- A Variety of Decorative Accessories



Van Buren hand-painted Ceramic Fiber Log Set (BVD34) on Contour Burner



Van Buren 34 Deluxe Flush B-Vent Fireplace



Van Buren 42 Premium Flush B-Vent Fireplace shown with optional Ceramic Aged Brick Liner

OUTER FRAMES & BOTTOM TRIM

Our metal three-piece outer frames let you transition from your fireplace to any adjoining surface – wooden mantel, tile, stone, or any noncombustible material. Choose from steel frames with traditional crisp lines. Each is available in matte black or hammered pewter. Our bottom trim completes the fourth side of the color frame.

LINERS




Aged Brick



Smoked Herringbone


FRAME WITH BARRIER SCREEN

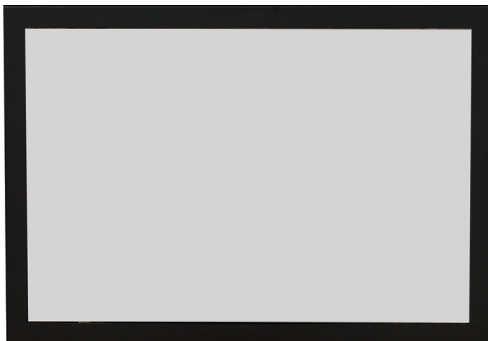

Rectangle Door Frame with Barrier Screen

DECORATIVE DOORS (include handles)

Requires Rectangle Frame with Barrier Screen

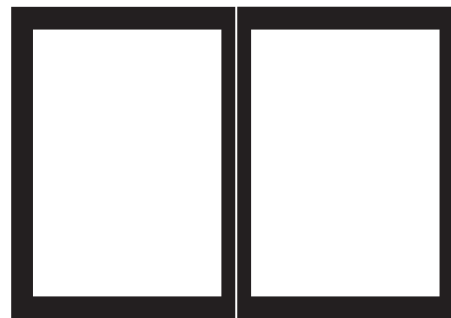

Decorative Door Plain Rectangle

DECORATIVE LOUVERS (with screens)



Decorative Louver Arch



Decorative Louver Mission

BOTTOM TRIM



Bottom Trim (Hammered Pewter)

CONTROL OPTIONS

Choose from battery-operated or electric remote control, or opt for the simple wall switch.



FWS Wall Switch




FRBC Battery-operated Remote Control

VAN BUREN FIREPLACE SPECIFICATIONS

Model	A	B	C	D	E	F	G	H	I	J	Max Weight (lb.)	Input Btu	Vent Size (inches)
Van Buren 34	37	34	22 7/8	35 5/8	32 3/4	14 7/8	6 3/8	5 7/8	24 1/2	12 1/4	110	21,000	4
Van Buren 36	39	36	24 7/8	37 5/8	34 3/4	18 3/8	6 3/8	8 3/8	22 1/2	11 1/4	121	25,000	6
Van Buren 42	43	40	24 7/8	37 5/8	34 3/4	18 3/8	6 3/8	6 3/8	26 1/2	13 1/4	134	30,000	6

Fireplace Specification Dimensions are in inches.

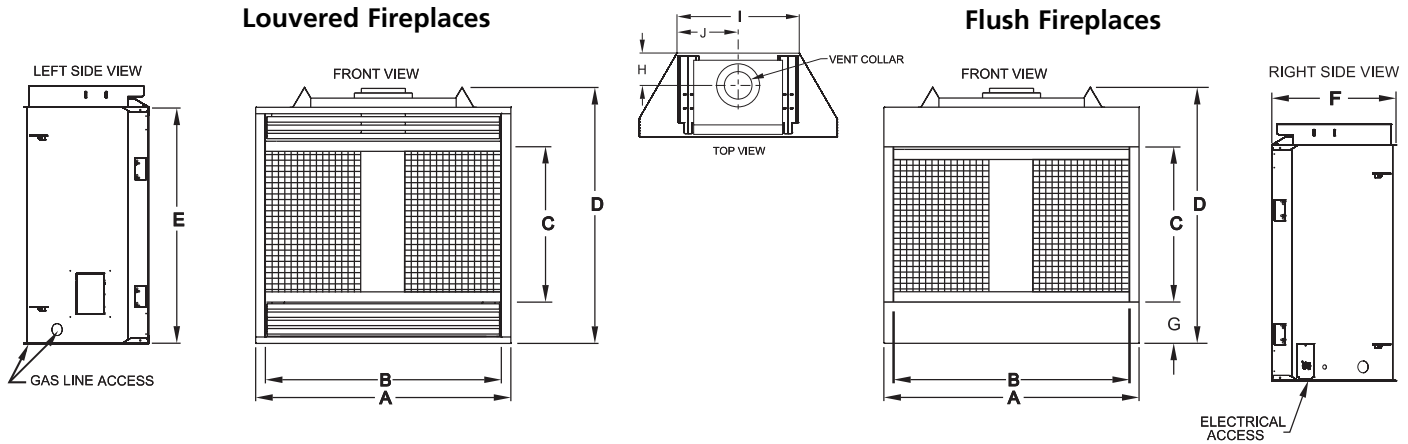

VAN BUREN FIREPLACE FRAMING DIMENSIONS

Model	Framing Width	Framing Height	Minimum Framing Depth
Van Buren 34	37 3/8	35 3/4	14 3/8
Van Buren 36	39 3/8	37 3/4	17 7/8
Van Buren 42	43 3/8	37 3/4	17 7/8

Framing Dimensions are in inches.

VAN BUREN MANTELS – SEE PROFILE MANTELS AND MANTELSHELVES

For most installations, this B-Vent fireplace will be framed in behind a wall or in a chase.

Gas Inlet for Fireplace Models	
Type of Gas	Natural (Propane conversion kit available)
Iron Pipe Size (N.P.T.)	1/2-inch
Ignition System	Standing Pilot/Piezo or Intermittent Pilot

Warranty

All parts carry a 3-year limited warranty.

All remote controls carry a 1-year limited warranty.

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos.

Member of the following industry associations:



This appliance is design-certified to the ANSI standard by:

The Empire Comfort Systems and American Hearth names and logos are registered U.S. trademarks.



SINCE 1932

Empire Comfort Systems Inc.
918 Freeburg Ave.
Belleville, IL 62220-2623
info@empirecomfort.com
AH-00836 9/27/19