



**Features**

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- No additional wall or trap stabilizer kit required
- Tub filler: Maximum flow rate: 10 gpm (37 L/min) at 60 psi
- Handshower: Flow rate: 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8 L/min)
- Ceramic mixing cartridge
- Handshower holder may be adjusted forward during installation
- Rough valve sold separately (9511)

**Codes/Standards Applicable**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) / DOE (2.0 & 1.8 gpm)
- Commonwealth of MA
- EPA WaterSense handshower (2.0 gpm)
- ADA compliant (with lever handles)
- Local codes may require installation of an upstream tempering valve



**7711-XX.20**  
**7711-XX.18**





XX = DENOTES HANDLE SERIES

7711-FB.FR shown

DIMENSIONS, in. [mm]		
HANDLE OPTIONS	A	B
45	3" [77]	1 6/4" [158]
70	3 2/4" [70]	15 5/16" [151]
77	3 2/4" [70]	3 5/4" [147]
E3	15 3/16" [101]	11 5/16" [144]
E4	3 2/4" [70]	5 6/16" [160]

THROUGH-HOLE SPECIFICATIONS			
	MIN	RECOMMENDED	MAX
MOUNTING FLANGE:	Ø 3-11/16" [94]	Ø 3-11/16" [94]	Ø 3-15/16" [100]

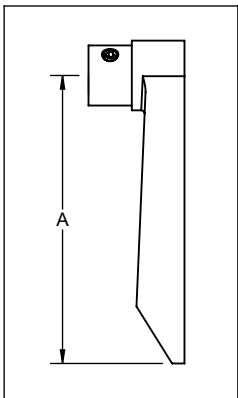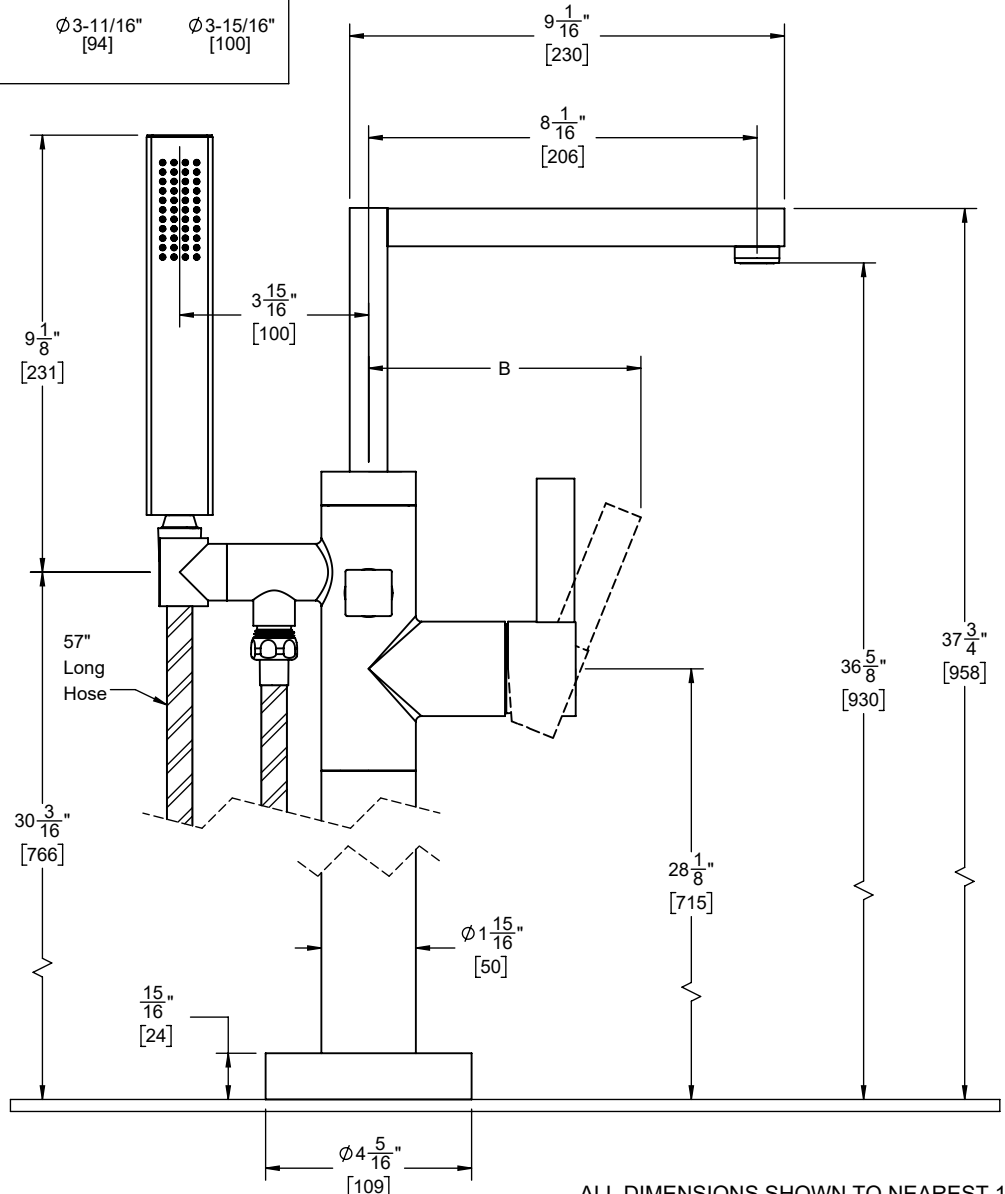

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"  
[ALL DIMENSIONS SHOWN TO NEAREST 1MM]