

Collection:Nota


Installation manual for: LD4057D40 L40.6"W7.9"H6.9"L3

## Installation instructions:

- 1. Using the screw (P7) secure the mounting bracket (P4) to the junction box.
- 2.According the mounting bracket (P1) to punching two holes in wall and put the expanded colloid (P5) in holes. Secure the mounting bracket (P1) by tapping screw(P6).
- 3. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 4. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 5. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 6.M5 screw (P3)pass through the holes in canopy plate and tighten by nut (P10).
- 7.Install the metal ring (P16) and lampshade (P15) then tighten by lamp holder ring (P17).

8.Install the bulb(not included) in lamp holder (P14).

The end!

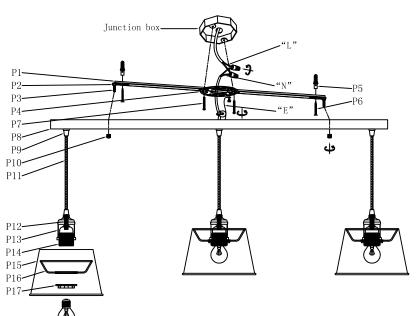

## PARTS LIST

part	picture	Description	Qty	Check li	st
P1		L24.8" Mounting bracket	1		
P2		M5 Nut	2		
Р3		M5 Screw	2		
P4		<b>Ø</b> 4.0″ Mounting bracket	1		
P5	- Carrier Control	Expanded colloid	2		
P6	<b>—</b>	Tapping screw	2		
P7	•	5/32-32 Screw	2		
Р8		L36"Canopy plat	1		
Р9		Ø0.7″Wire lock	6		
P10		Nut	2		
P11		Power Cord 6.5' 18# Black	3		
P12	1	Threaded pipe	3		
P13		Lamp cup	3		
P14		E26 Lamp holder	3		
P15		7.9"Lampshade	3		
P16		Metal ring	3		
P17		E26 Lamp holder ring	3		

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire