


Collection: TULLY

Installation manual for: LD5010F18 D18"H11"L6

## Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in side of top unit the mounting bracket.
- 6.Use the finial (P9) to fix the canopy(P4) into the mounting bracket(P1).
- 7. Hang crystal string (A, B, C&D) into canopy (P4).
- 8.Install the bulbs(not included) into the lamp fixture.

## The end!

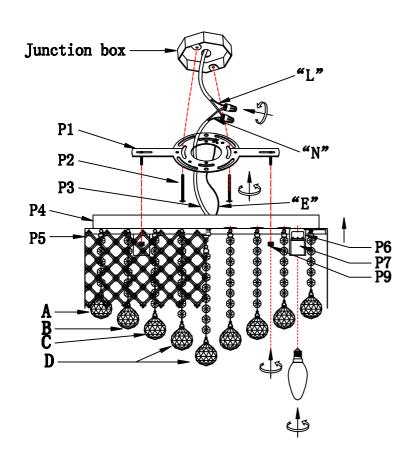

## PARTS LIST

part	picture	Description	Qty	Check	list
P1	<b>-</b>	L12.6" Mounting bracket	1		
P2	<del></del>	5/32-32 Screw	2		
P3	~	Power Cord 10" 18#	1		
P4		Ø16.5"H1" canopy plat	1		
P5		D17.7"H5.8" metal lampshade	1		
P6		D1.2"H2" metal lampcap	6		
P7		E12 lampholder	6		
P8	å	finial	1		
P9	<b>m</b>	finial	4		
A	<b>6</b>	Crystal	20		
В	•	Crystal	14		
С	••••••	Crystal	9		
D	••••••	Crystal	5		

"L" = Hot wire

"N" = Neutral wire
"E" = Ground wire