


PRODUCT NAME: Flute 35-LT LED Pendant
ITEM NUMBER: E10017

Please consult your electrician for hanging fixture and wiring.

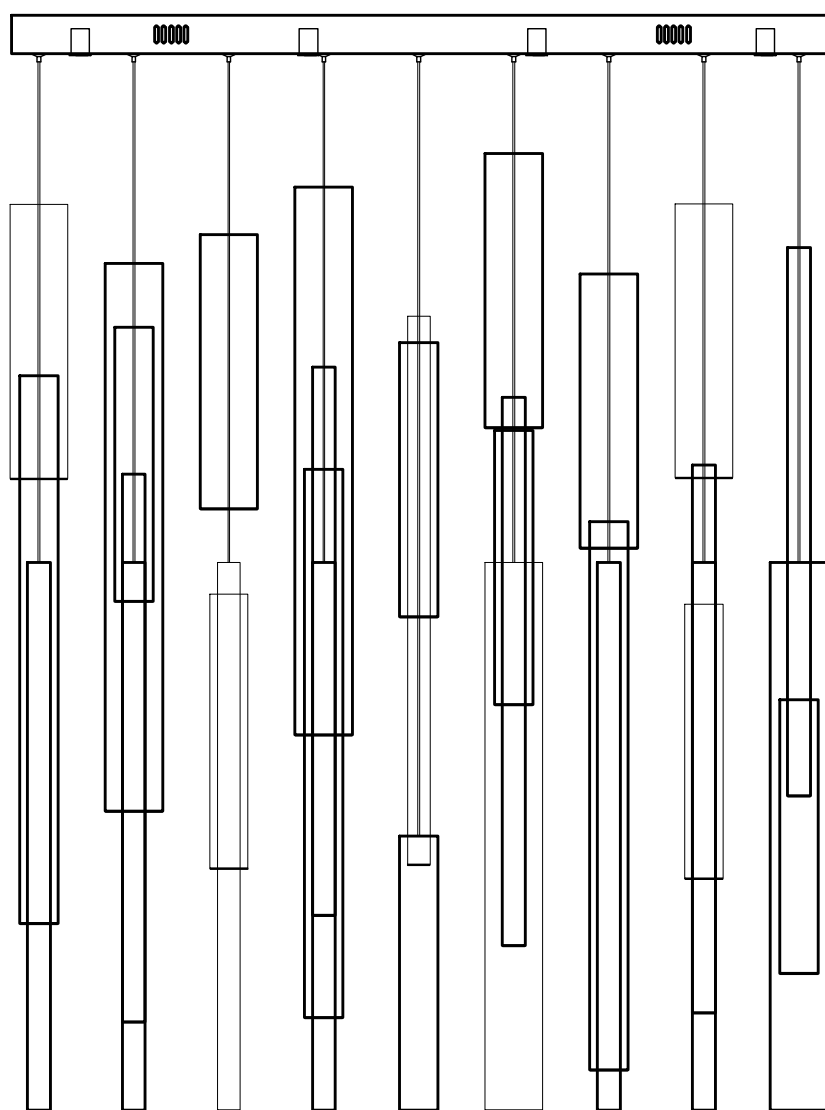


WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

The fixture is designed to dim with a standard Triac forward phase dimmer.
Dimming levels will vary by dimmer.
Below is a list of recommended dimmers:
Lutron DVELE-300P
Leviton IPL06-10Z
Leviton 6674-POW
Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

Bulbs (included): LED 96.5W




IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



Screws*6PCS

Bracket

Mounting Screws*6PCS

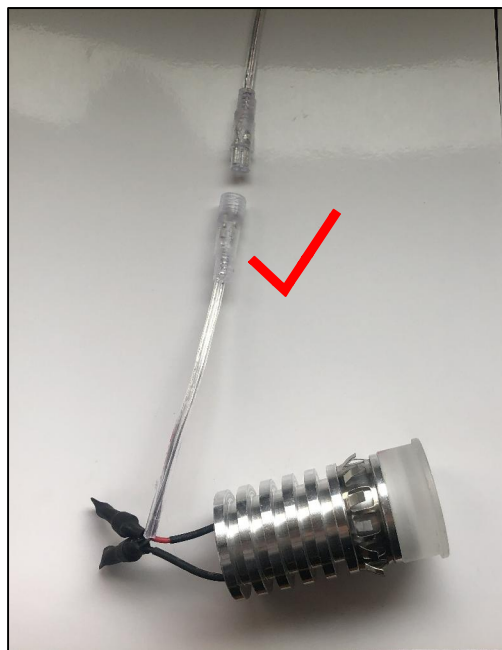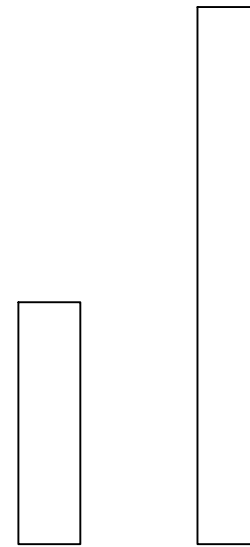

Ø1"= D1: L24"*12PCS

White plug-in pin

Ø1.75"= D2: L12"*6PCS


Ø1.75"= D2: L24"*4PCS

Transparent plug-in pin


Ø2.5"= D3: L12"*5PCS

Ø2.5"= D3: L24"*4PCS


Black plug-in pin

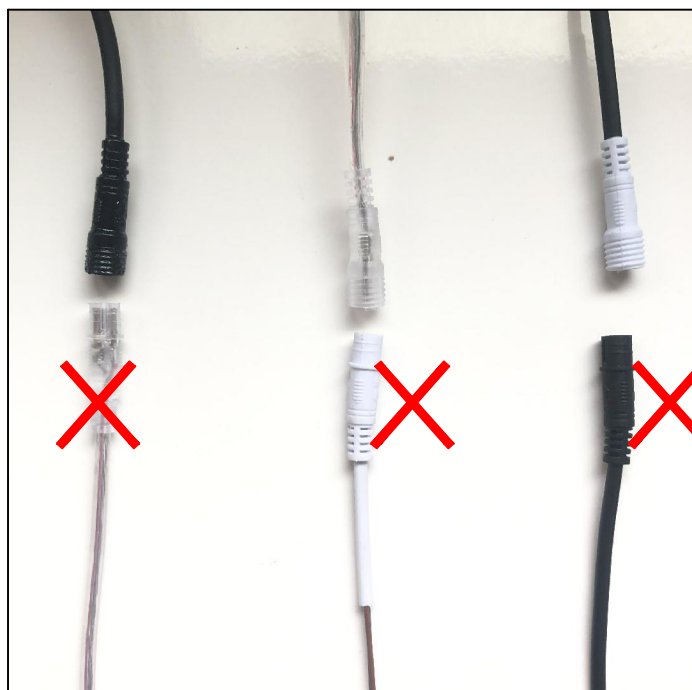


Locate all hardware & components before discarding packaging

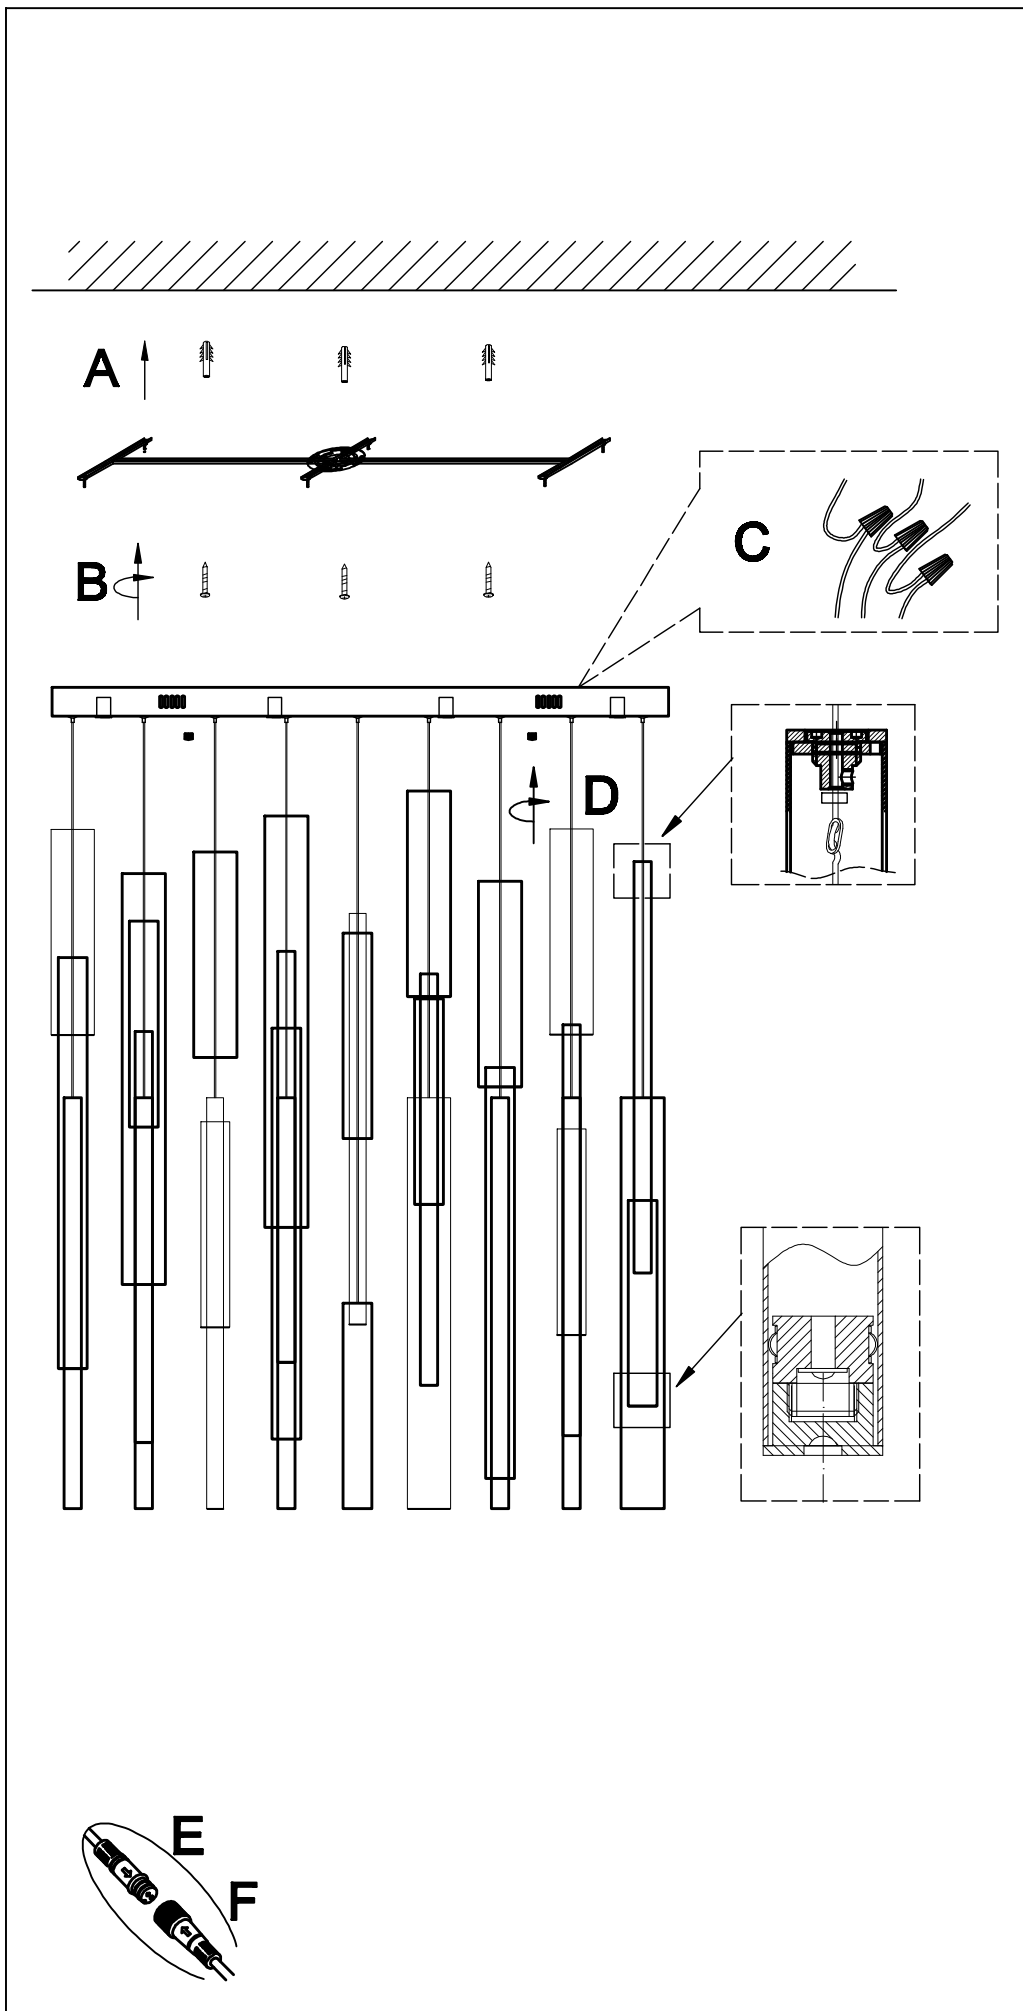


Cleaning & Care:
 You may use talcum powder and a soft cloth for cleaning. Do not use abrasive cleaner.

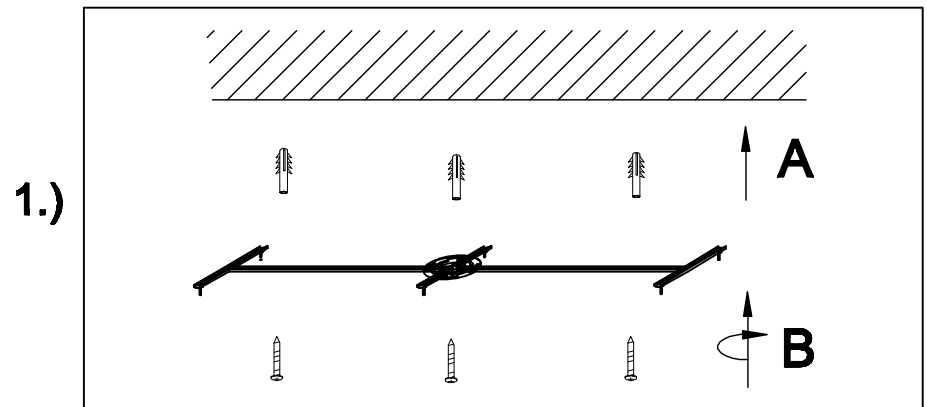


1.)
 Step 1: Remove mounting bracket from fixture and install to electrical box.

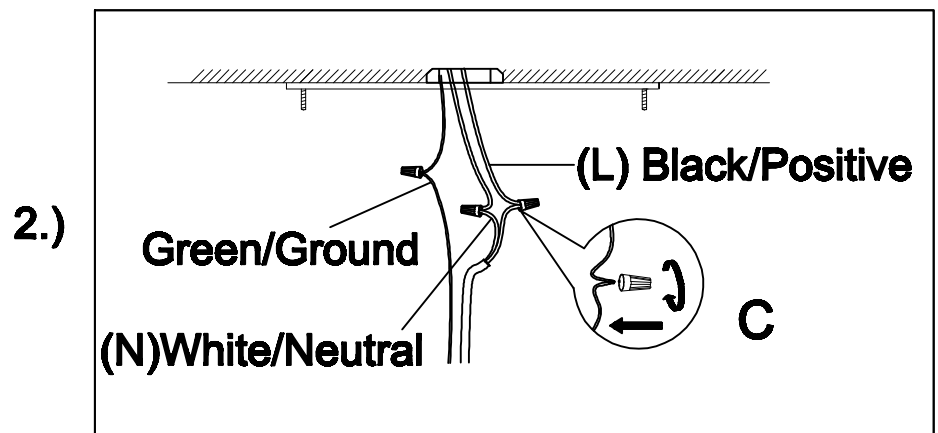

2.)
 Step 2: Adjust wires to desired mounting height. Wire fixtures to wire in outlet box. Refer to dual plastic wire instructions to connect low voltage wire to driver.

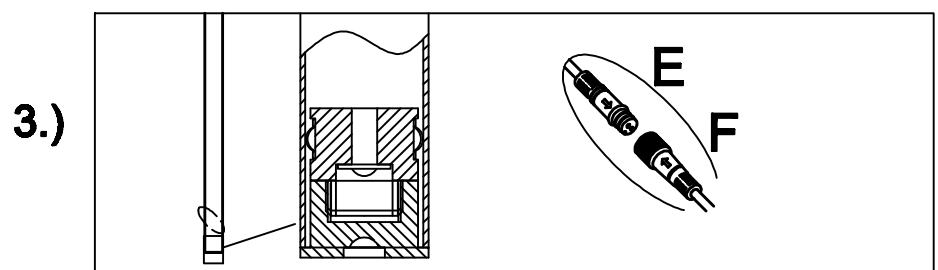


3.)
 Run the wire through the tube and plug in (E) and (F) following the direction of written on the plug.

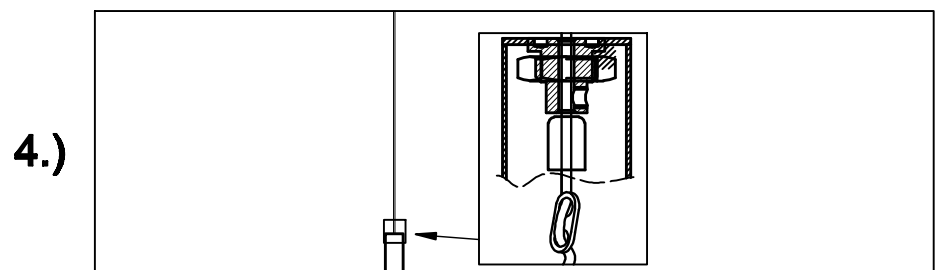


4.)
 Tighten the top lid on the tube using the fork tool provided until flush.

Please follow tube position as drawing arrangement

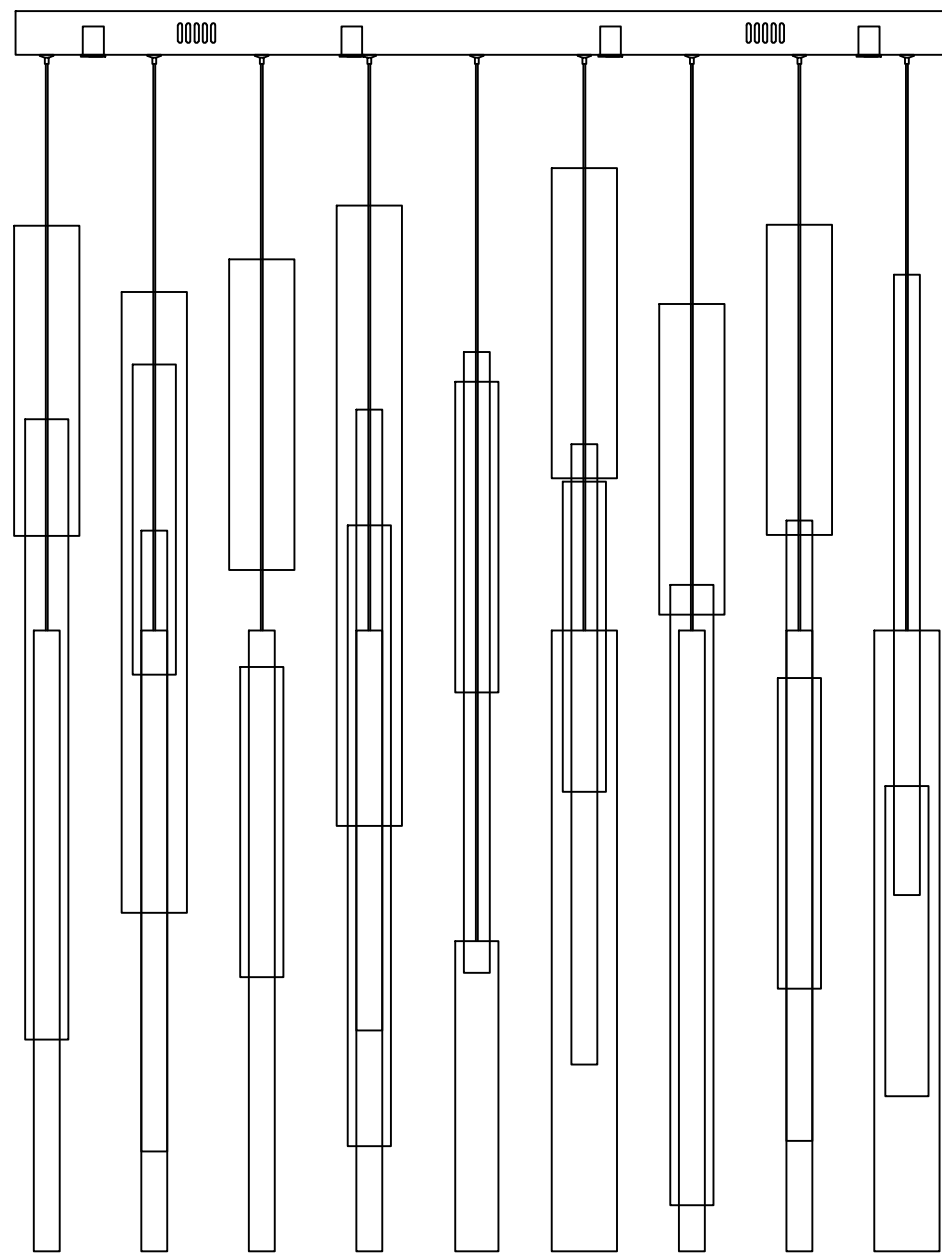

Upward View

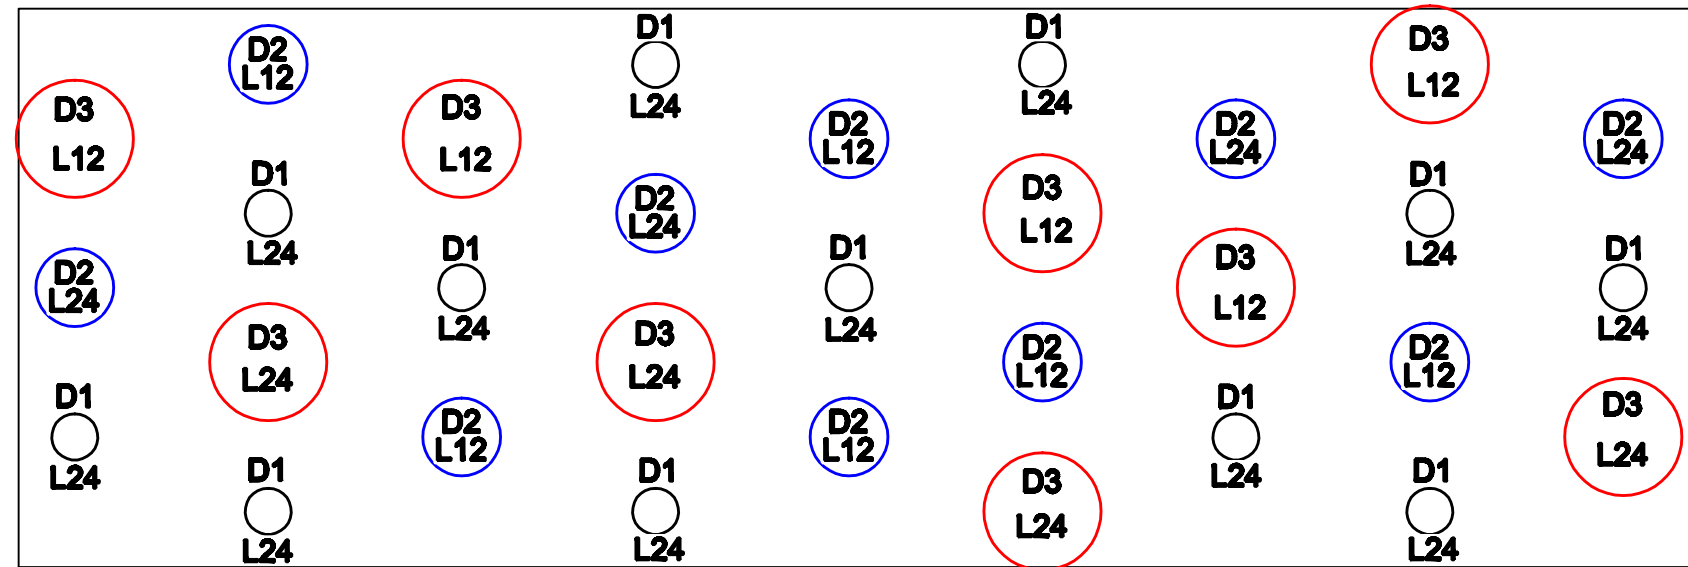

Please check the label on wire and label on pipe to find correct pipe for install, eg. A wire with D3, L12 label should connect to a pipe that with D3 L12 label on it.

D1 = Thin = $\phi 1'' = 1W$


D2 = Medium = $\phi 1.75'' = 4W$

D3 = Wide = $\phi 2.5'' = 4.5W$


L12=L12''

L24=L24''

Pendant Wires

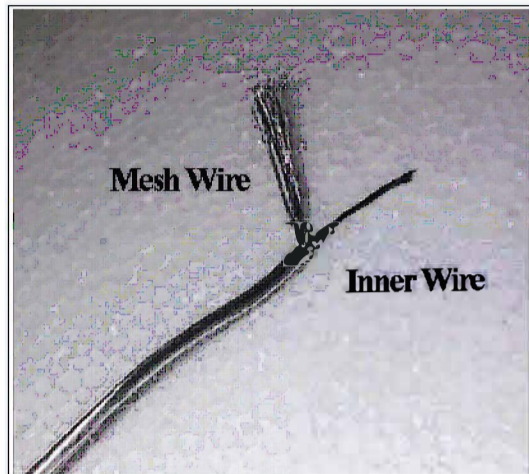


Driver Wires

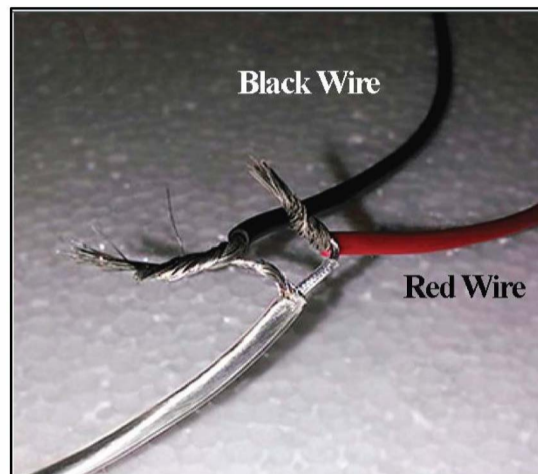

Pendant	Driver
InnerWire (+)	DriverRed (+)
Outer Mesh (-)	DriverBlack (-)

If wires are cut in the process of adjusting the height, please note the pendants consist of an outer mesh wire(ground) and inner(live) wire that must be separated before re-joining with the driver output wires. Pendant are wired in series to the drivers, as shown below

LT20W120-50-C0350 LT20W120-50-C0350 LT20W120-50-C0350 LT25W120-50-C0520 LT25W120-50-C0520

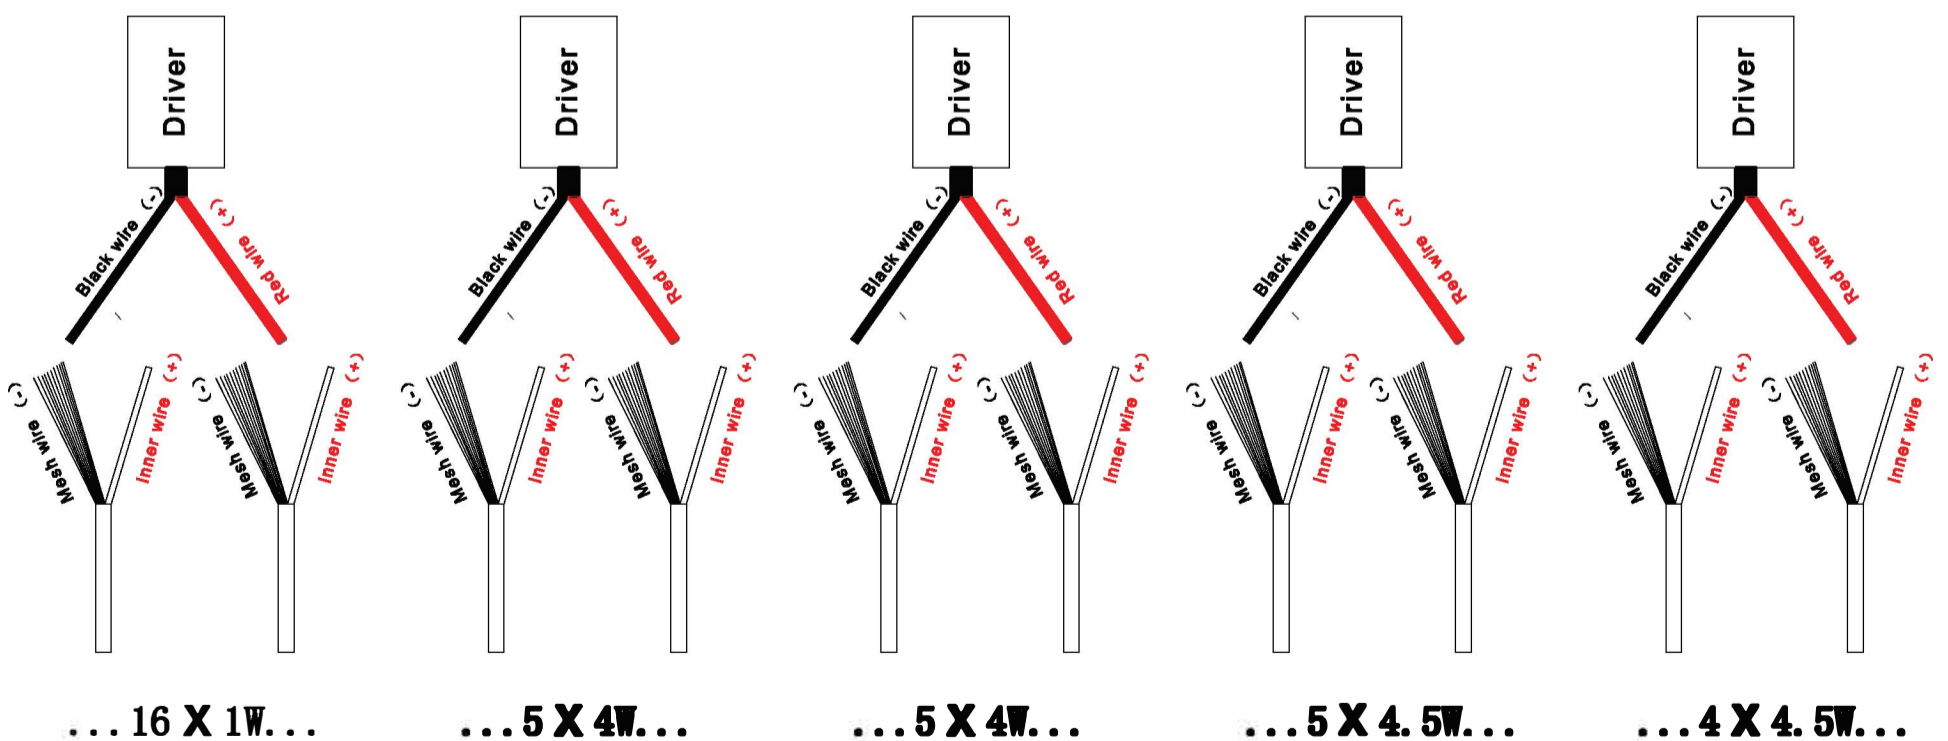

... 16 X 1W...

... 5 X 4W...


... 5 X 4W...

... 5 X 4.5W...

... 4 X 4.5W...



Please **WATCH** installation video
BEFORE installing the Fixture !

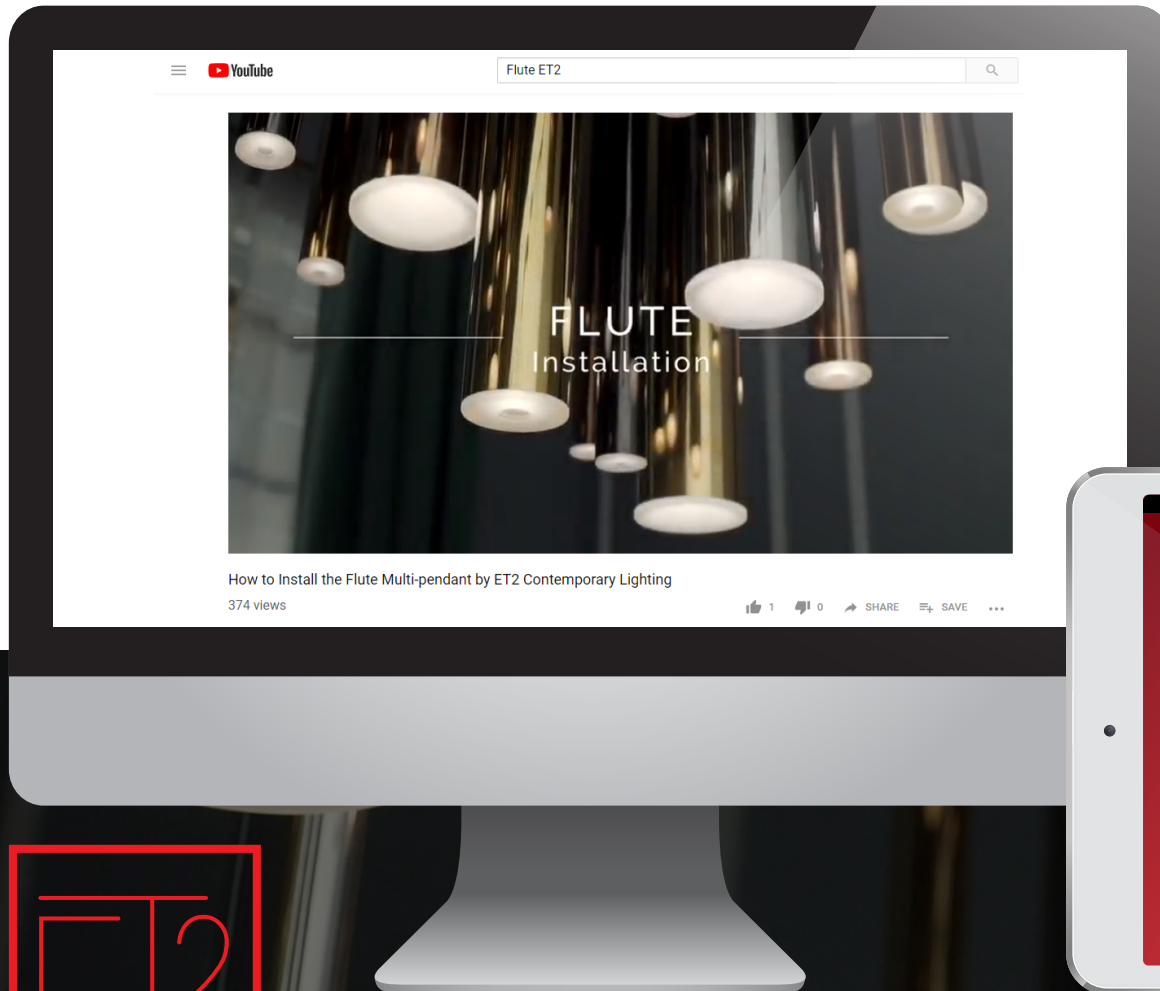

SCAN FOR LINK



E10017-MPLT

HOW-TO GO TO THE LINK:

- Scan QR Code with QR Reader
- OR
- Go to **youtube.com**, and looked up for "ET2 Flute installation."

