# **Elate™ Tall**

Sliding shower door, 75-1/2" H x 68-1/4 - 71-5/8" W **K-707617-8L** 

## **Features**

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Vertical handle with inside knob on moving panel.
- Gently-curved towel bar provides integrated storage on fixed panel.
- Tempered glass ensures maximum safety and durability.
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.
- Smooth, easy-to-clean wall jambs.
- Full-length moving panel seal provides excellent water containment.
- Coordinates with other items in the Elate collection.

### Material

- Frameless, heavy 5/16" (8 mm) thick Crystal Clear tempered glass.
- Anodized aluminum prevents rust and corrosion.

### Installation

- Fits opening widths 68-1/4" 71-5/8" (1734 1819 mm).
- Shower door is 75-1/2" (1918 mm) tall, with a lofty 72-11/16" (1846 mm) minimum head clearance.
- 3-3/8" (86 mm) width adjustment.
- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

## **Recommended Products/Accessories**

K-23723 Faucet cleaner



# Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

# KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

| Color | Code | Description   |
|-------|------|---------------|
|       | SH   | Bright Silver |
|       | MX   | Matte Nickel  |
|       | BL   | Matte Black   |

# Available Glass Options Code Description

L Crystal Clear






# **Elate™ Tall**

Sliding shower door, 75-1/2" H x 68-1/4 - 71-5/8" W



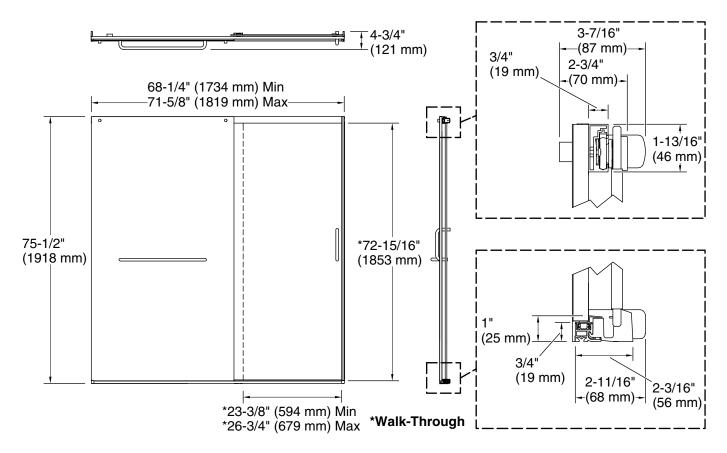

# **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - 68-1/4" (1734 mm)

Min:

Opening Width - 71-5/8" (1819 mm)

Max:

Walk-through - Min: 23-3/8" (594 mm)
Walk-through - Max: 26-3/4" (679 mm)
Base-To-Wall 1/2" (13 mm)

Radius – Max:

Glass thickness: 5/16" (8 mm)
Glass coating: CleanCoat®

### **Notes**

The vertical opening should be a minimum of 78-13/16" (2002 mm) to allow for installation clearance.

