

Bijou 1530 Wall Mirror - Specification Sheet

Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 2100 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- Single phase wire installation, silver backed, copper free
- Construction for surface mounting
- Includes installation hardware

Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 26.4W
- Electric Current: 0.24A
- Wattage: 26.4W

Model


- Bijou 1530



Bijou 1530 Wall Mirror - Specification Sheet

Dimensions

- Height: 30"
- Width: 15"
- Depth: 1-11/16"

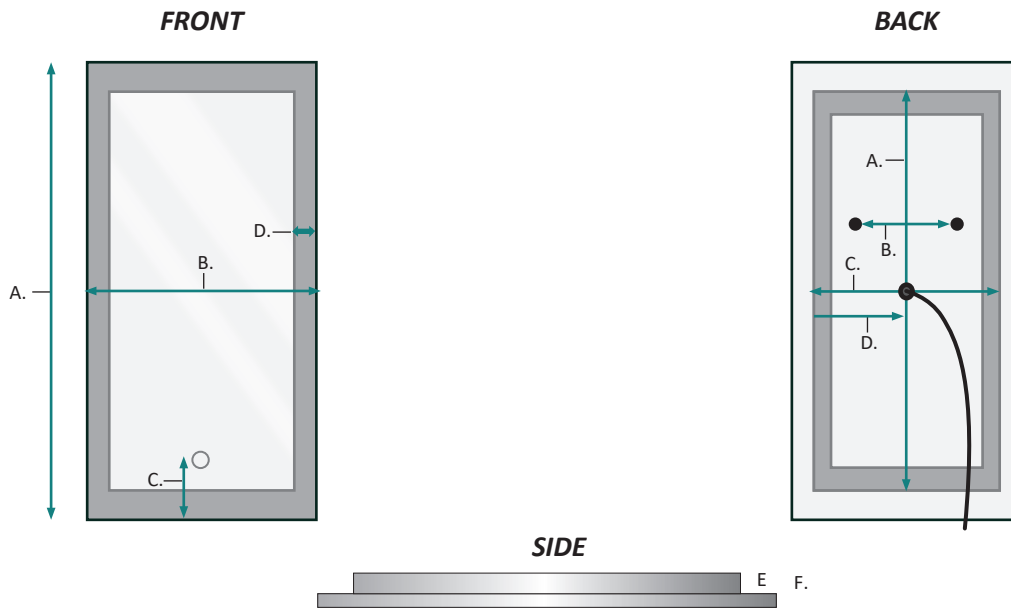

FRONT & SIDE

MODEL	A	B	C	D	E	F
Bijou1530	30	15	4-1/2	1-1/4	1-1/2	3/16

BACK

MODEL	A	B	C	D
Bijou1530	23-5/16	11-5/16	11-1/2	11-1/2