

Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 6000K
- 3100 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount (Side Mirror Trim Panels included) or Recessed
- · Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 53W
- Electric Current: 0.44A
- Wattage: 53W

Model

- SVANGE 4236R Right Swinging Door
- Included models in this configuration:
 Cabinet 1 = 1836L Cabinet 2 = 2436R

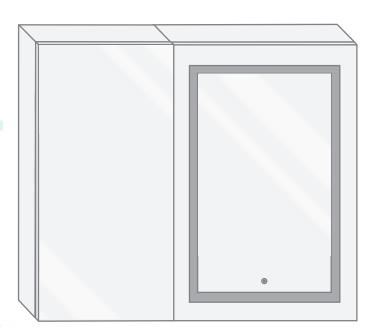


Outlet


- Performance Requirements: Contains the required Supervisory Circuit with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency: 60Hz
- Front Receptacle Current: 102-132VAC Nominal 15A
- USB Output Current: 5VDC Nominal 4A




CABINET CONFIGURATION

Included models in this configuration:
 Cabinet 1 = 1836L Cabinet 2 = 2436R

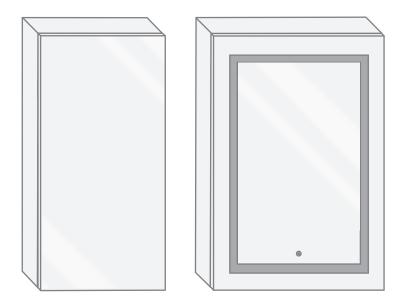

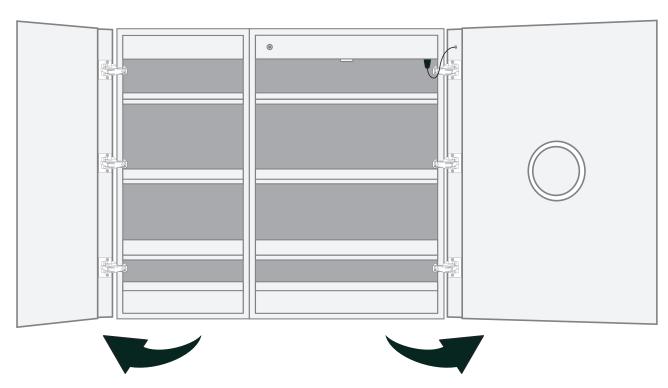




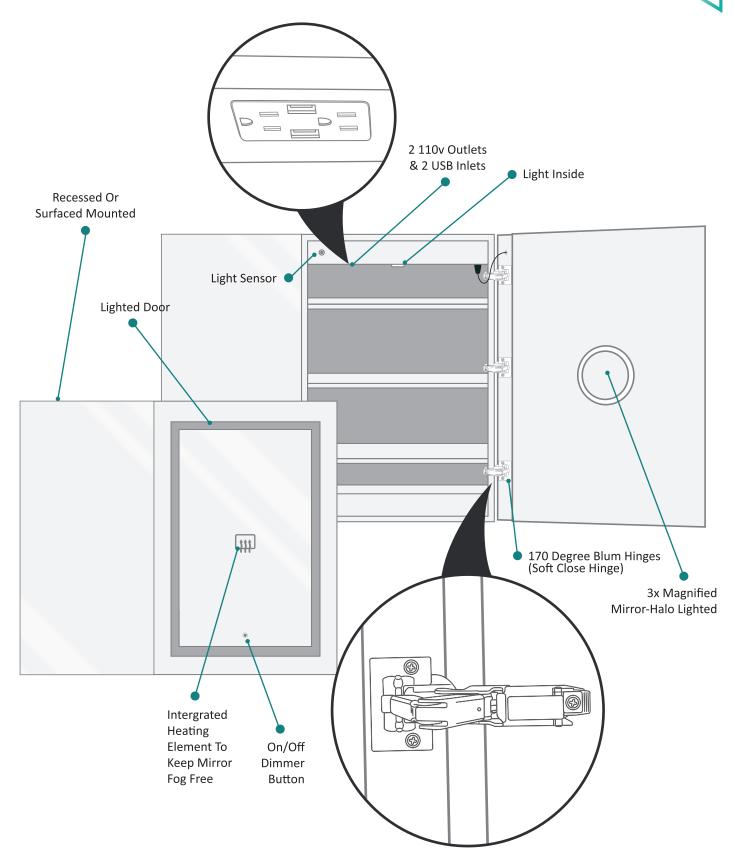




SURFACE MOUNT

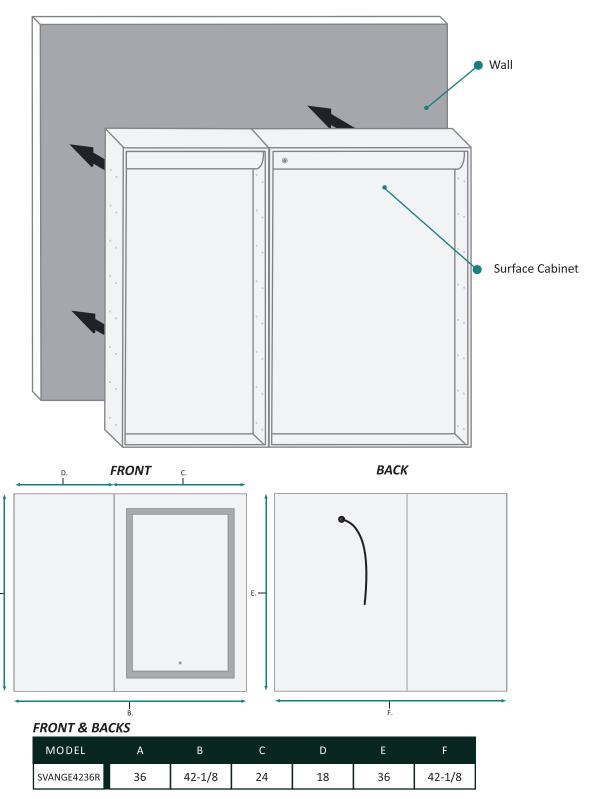

These measurements are for reference, for best results we suggest you measure actual product as small variations in size are possible




RECESSED MOUNT

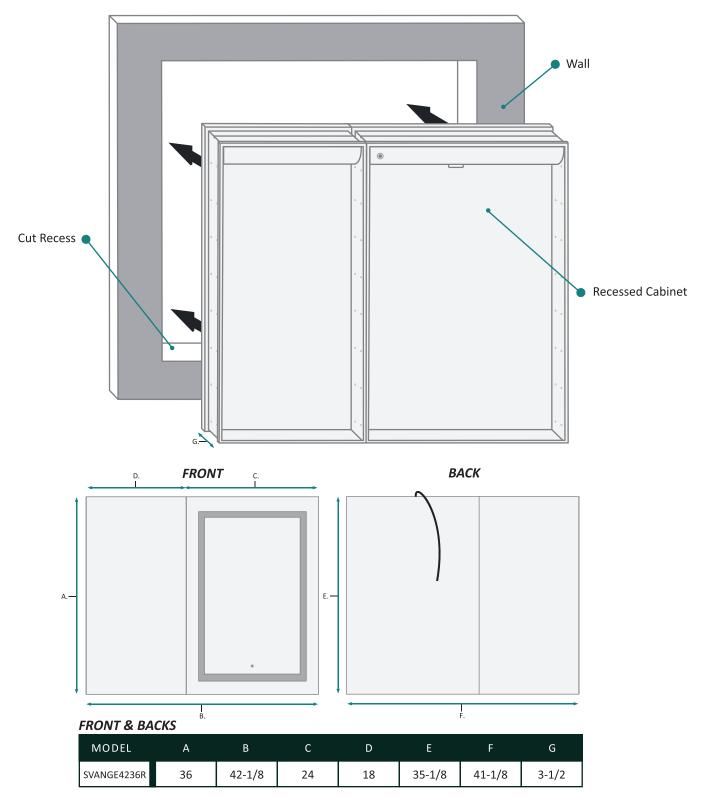


These measurements are for reference, for best results we suggest you measure actual product as small variations in size are possible



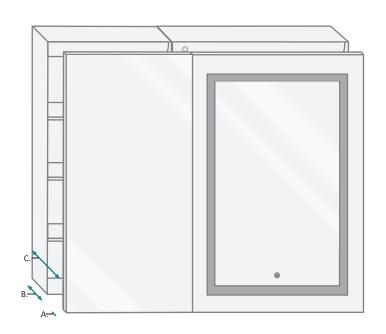


INTERIOR DOOR



DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE4236R	7/8	3-1/2	5	18	3-1/8	5-1/4	13

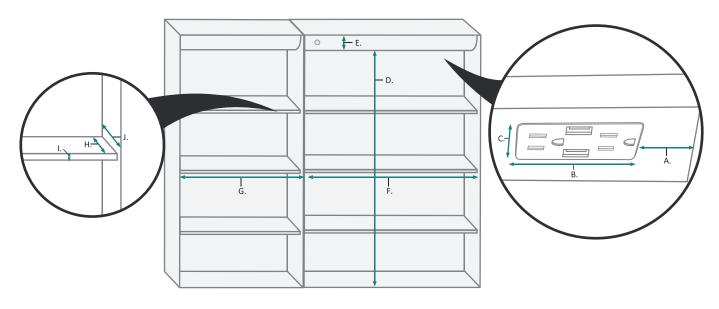

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	1	J
SVANGE4236R	3-3/4	5-5/8	1-1/4	32	2-1/4	22-1/4	16-1/4	2-3/8	3/8	3-5/8

These measurements are for reference, for best results we suggest you measure actual product as small variations in size are possible