


6036IFM



Shown with color matched SculptureStone® drain cover

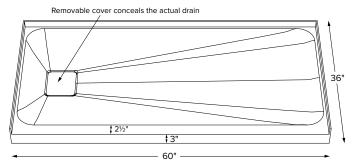

When ordering, please specify left- or right-hand drain.



Optional stainless steel hidden drain cover shown above

60" x 36" x 3"	
SINGLE THRESHOLD smooth floor	
End Drain	
DoloMatte®	



Model #	Material	Color / Finish	Package Content	MSRP
SBDM6036IFM	DoloMatte®	White (CWH) / Matte	Matching SculptureStone Hidden Drain Cover, PVC drain kit in chrome finish	\$2,420

Available in white only.

Options Must be ordered at time of purchase

Quick Ship (QSPRI) \$430

Reduces lead time. Please call for availability.

Radiance® (RAD100) \$1,595 Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.

Hidden Drain Cover Options Substitute included Hidden Drain Cover with any of the following available options:

Natural Stainless Steel Hidden Drain Cover (DCH6S)

Powder Coated White Stainless Steel Hidden Drain Cover (DCH6W) Must specify part code on order; comes in lieu of standard cover.

PVC Drain Kit Finishes Chrome included with shower base Brushed Nickel upcharge (SBDKBN) \$65

Accessories

Drain Kit Options

Solid Brass Drain Kit with Stainless Steel Trim (SBDKSB) \$195

Teak Shower Seat

Premium

Natural Stainless (TK-SSEAT2416BNS) \$3,035

High-Polished Stainless (TK-SSEAT2416BHP) \$3,465

Natural Stainless (TK-SSEAT2215NS) \$1,125

High-Polished Stainless (TK-SSEAT2215HP) \$1,575

Teak Bath Mat (TKMAT3018) \$815 Measures 30" x 17.5" x 1" Custom sizes also available. Contact MTI for details.

IMPORTANT ORDERING & INSTALLATION INFORMATION

- 3-sided integral tile flange to facilitate installation. Must specify drain hand on order.
- . Single threshold design.
- . 3.5" drain opening pre-drilled.
- Drain finish options on this sheet are upcharge prices only. Contact MTI for ordering details for drain kits sold seprately.
- . Add proper wet-bedding compound to fully support bottom of shower base. See installation instructions.
- . All bases are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte bases meet ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

See the Installation & Operation Manual for more details. MTI's Customer Service: Monday-Friday 8am-6pm EST **800-783-8827** or service@mtibaths.com

Options and accessories may be packaged inside the box. Always check packaging before discarding.

before discarding. All product measurements are ±1/2". Specifications and configurations are subject to change without notice. Measurements herein supersede all others published prior to publication date below.