



ASSEMBLY AND MOUNTING INSTRUCTIONS

GENERAL

- **WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED**
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOULD BE COMPLETED BY A LICENSED ELECTRICIAN
- **FAILURE TO INSTALL FIXTURE CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH**
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.
- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

INSTALLATION

- | | |
|--|--|
| <p>STEP 1. Feed the wires through pipe stems, connector, and canopy. Twist stem tightly onto the body. Keep adding additional stems to you desired height. The canopy is secured by connector, washer, and hex nut to the stems.</p> <p>STEP 2. Determine the location for the lamp. Using the mounting plate as a template, mark the location of the holes for the wall anchors.</p> <p>STEP 3. Drill the appropriate size holes for the wall anchors. (the holes should be slightly smaller than the size of the anchors.) Install the wall anchors to the hole.</p> <p>STEP 4. Install mounting plate onto the outlet box by using the (2) mounting screws, Screw in the wood screw to the anchors.</p> <p>STEP 5. Fasten bare ground wire to ground wire from the wall outlet box (usually green or copper color) or connect ground wire to green screw on the mounting plate.</p> <p>STEP 6. Connect the neutral (white) fixture wire coming from the fixture base to neutral (usually white) outlet wire. Fasten</p> | <p>both wires together with a plastic wire nut and tightly wrap the wire nut with electrical tape.</p> <p>STEP 7. Repeat the previous step with the hot (black wires). Make sure there are no exposed wires or strands that could cause a dangerous short circuit.
FAILURE TO CONNECT THE APPROPRIATE WIRES CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH!</p> <p>STEP 8. Carefully place connections back into the outlet box</p> <p>STEP 9. Place canopy over the mounting plate and secure with the end nuts.</p> <p>STEP 10. Attach the small glass shades and large glass shades onto the fixture</p> <p>STEP 11. Install the lamp(s). The fixture is rated for 20-watt type G9 xenon lamp.
DO NOT EXCEED RECOMMENDED WATTAGE!</p> <p>STEP 12. Restore power to the circuit at breaker or fuse-box.</p> |
|--|--|

DIMMING


The fixture can be controlled by a wall dimming device. Only use triac/electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be provided by your local electrical distributor, home center, or hardware store.

CLEANING

Please clean with a soft, dry cloth ONLY! Do not use cleaning products.



ASSEMBLY AND MOUNTING DIAGRAM

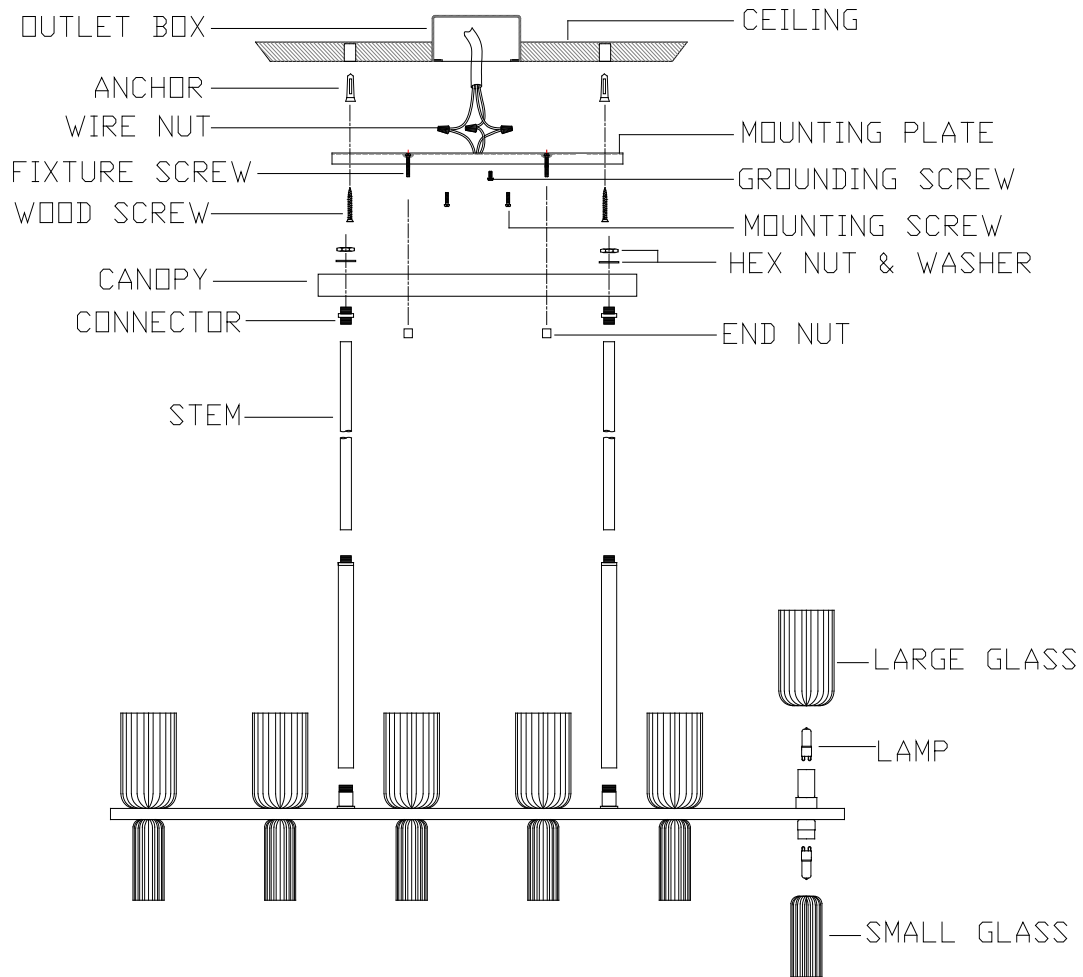

WIRE NUT/TAPING DIAGRAM

