



ASSEMBLY INSTRUCTIONS Model 98-B0100 Pendant

CAUTION: A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS FIXTURE IN ACCORDANCE WITH ALL APPLICABLE LOCAL CODES AND WITH FULL KNOWLEDGE OF THE HAZARDS INVOLVED.


WARNING: THE ELECTRICITY MUST BE DISCONNECTED AT THE MAIN FUSE BOX OR CIRCUIT BREAKER PANEL BEFORE INSTALLATION OF THIS PENDANT – TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK. THIS PENDANT IS NOT DESIGNED TO SUPPORT EXTERNAL WEIGHT OTHER THAN THE LAMP SHADE THAT IT IS PROVIDED WITH.

Notes:

1. See instructions included with canopy for electrical wiring information.
2. This pendant is constructed using 3-conductor electrical wire. The gold thread indicates the ground wire.

Assembly Instructions

1. Install the glass shade (2) to the fixture cup (1) with silicon washer (4) and screw ring (5).
2. Plug the G9 bulb (6) into lampholder (3).

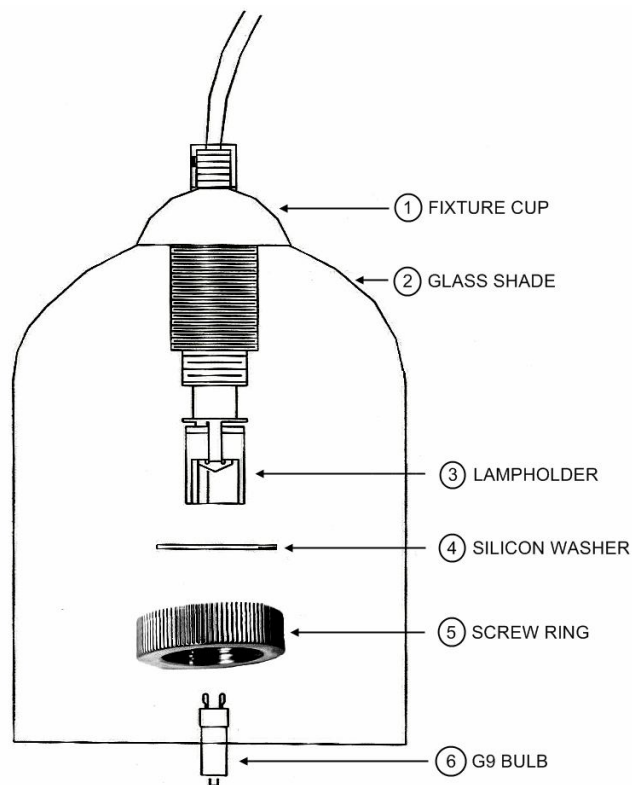

Note: Only operate with shatter resistant Sylvania CAPSYLITE® G9 bulb or equivalent.