



**Roca**

# **Bianco Venatino II**



PORCELAIN

# Bianco Venatino II

Bianco Venatino II, a timeless masterpiece. The majestic elegance of marble, with its dark and strong veins, creates a dramatic and luxurious feeling in any project.

Bianco Venatino II 35"x35" PO

Glazed & Polished Porcelain

12"x24" 24"x24" 24"x48" 35"x35"




Bianco Venatino II 35"x35" PO




Bianco Venatino II 35"x35" UP

# Bianco Venatino II







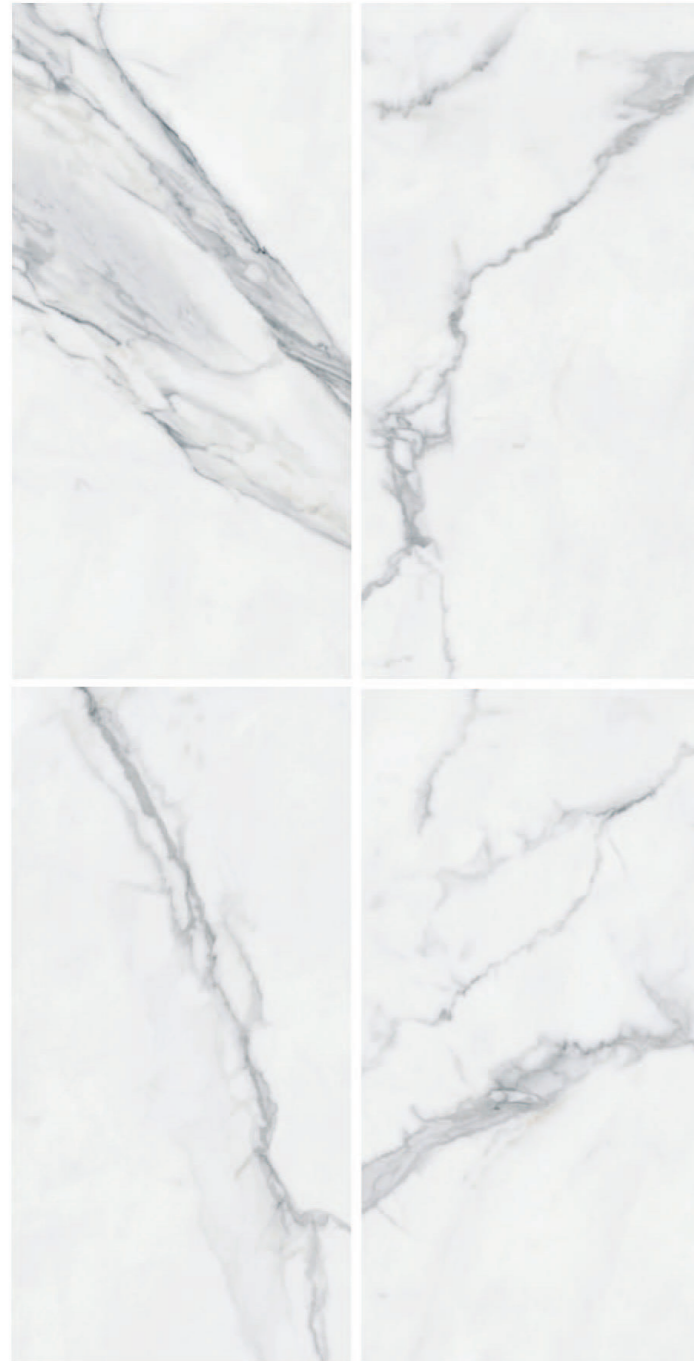



Glazed & Polished Porcelain



35"x35" 90x90cm    24"x48" 60x120cm    24"x24" 60x60cm    12"x24" 30x120cm



## Bianco Venatino II

-  **35"x35" R UP**  
UFBIAV-35
-  **35"x35" R PO**  
UFBIAV-35PO
-  **24"x48" R UP**  
UFBIAV-2448
-  **24"x48" R PO**  
UFBIAV-2448PO
-  **24"x24" R UP**  
UFBIAV-24
-  **24"x24" R PO**  
UFBIAV-24PO
-  **12"x24" R UP**  
UFBIAV-1224
-  **12"x24" R PO**  
UFBIAV-1224PO
-  **13"x13" UP Mosaic**  
UFBIAV-13M
-  **3"x12" UP Bullnose**  
UFBIAV-S4312

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		POLISHED	UNPOLISHED
Water Absorption	C373	<=0.5	<=0.5
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	3	4
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	3	4
Deep Abrasion - Unglazed Tiles	C1243	Pass	Pass
PEI - Glazed Tiles	C1027	4	4
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A1371	<=0.40	<=0.40
Shade and Texture Rating	CTDA "V"	V3	V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

## Packaging Info

Size	SF per carton	PC per carton
12"x24"	18.94	10
24"x24"	19.05	5
24"x48"	15.28	2
35"x35"	17.22	2
13"x13" UP Mosaic	13.15	11
3"x12" UP Bullnose	5.92	24