

SPECIFICATIONS

ANTIOCH™ TWO HANDLE MINI-WIDESPREAD LAVATORY FAUCET

Model

D304122

Description

- · Ceramic disc valve
- 5" high spout, 4 1/2" spout length, laminar flow
- 50/50 Touch down drain assembly
- 3 hole mount, 4" 12" installation
- 1.2gpm (4.5L/min) maximum flow rate @60 psi
- Meets CEC Requirement

Standards



NSF/ANSI 372

• NSF/ANSI 372




ASME A112.18.1M/A112.18.1



 ADA Accessibility Guidelines for Buildings and Facilities -309.4 Operation for Operable Parts

•WaterSense Pending







Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

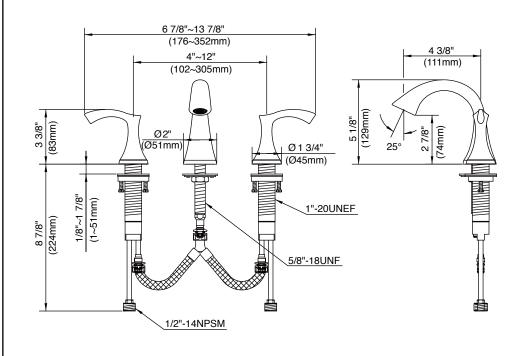



Submittal Information:	
Job Name:	Location:
Contractor	Contact #: