


Collection: Cashel Installation manual for:

LD2281 D7. 9"H8. 8"L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6.Fix the Mounting bracket(P1) to the Canopy and tighten by the screws(P4).
- 7.Fit lampshade(P9) with lampholder ring(P10).
- 8.Install the bulbs into the lamp fixture.(Bulb not included).

The end!

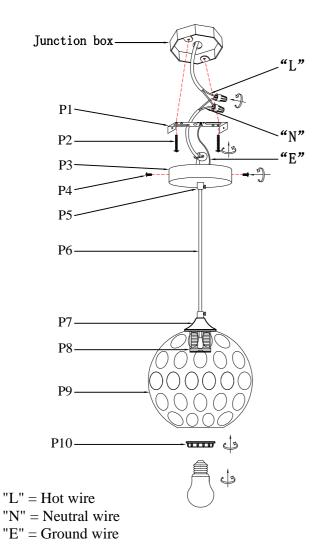

PARTS LIST

picture	Description	Qty	Check list
	L4.5" Mounting bracket	1	
(panennana)	5/32-32 Screw	2	
	Ø4.7″ Metal Canopy	1	
(Imm)	M4 Screw	2	
	Wire lock	2	
~	Power Cord 60" 18# Black	1	
	ø2.4″ Metal Cover	1	
	E26 Lampholder	1	
00000	ø7.9"Lampshade	1	
	Lampholder ring	1	
		L4. 5" Mounting bracket 5/32-32 Screw Ø4. 7" Metal Canopy M4 Screw Wire lock Power Cord 60" 18# Black Ø2. 4" Metal Cover E26 Lampholder Ø7. 9"Lampshade	L4. 5" Mounting bracket 5/32-32 Screw 2 Ø4. 7" Metal Canopy 1 M4 Screw 2 Wire lock Power Cord 60" 18# Black Ø2. 4" Metal Cover 1 E26 Lampholder 1 Ø7. 9"Lampshade 1